



(10)

()		
	(ASTM D-3652)	130
		100
		12
	50 %	21°C

()	(ASTM-D3330)	2.7 /10	
	(ASTM D3759)	26.3 /10	
		150%	
	:	75°	
		31 / ² /24	

471

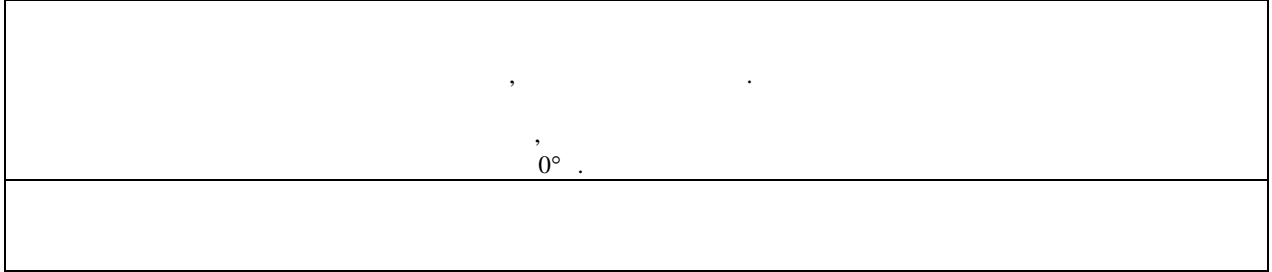

3

3M

125445

.24/ " "

Tel: (095) 784 7474

Fax: (095) 784 7475

